



White Stone **H4930**
NCS S 2000-N

w/r 4930
LRV 43.8

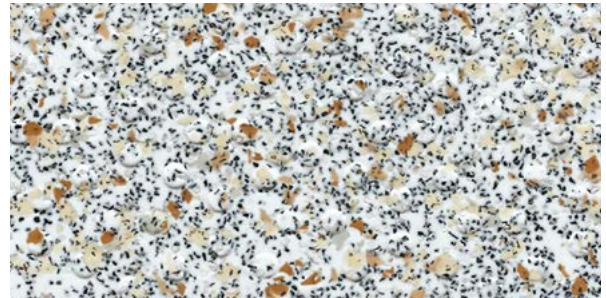


Bisque **H4860**
NCS S 2002-Y50R

w/r 4860
LRV 45.6

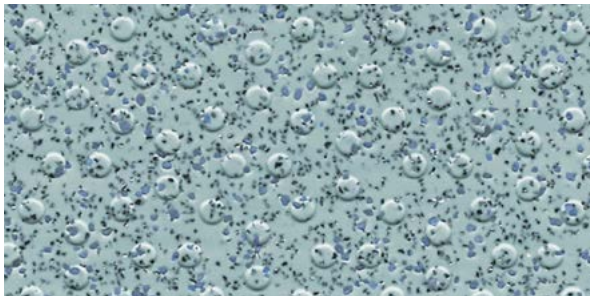


Sheared Slate **H4960**
NCS S 4010-B50G

w/r 4960
LRV 26.2

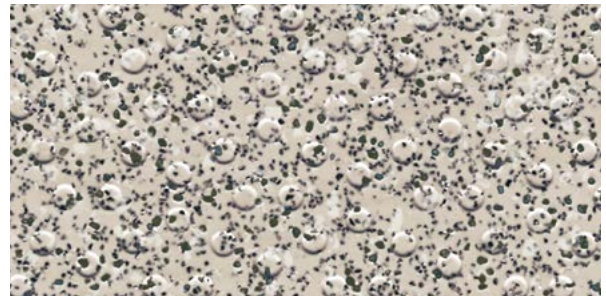


Oystershell **H4800**
NCS S 3010-Y60R

w/r 2010
LRV 34.4

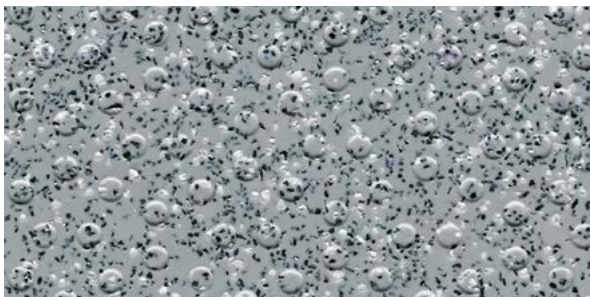


Tempered Steel **H4940**
NCS S 4502-B

w/r 4940
LRV 25.0

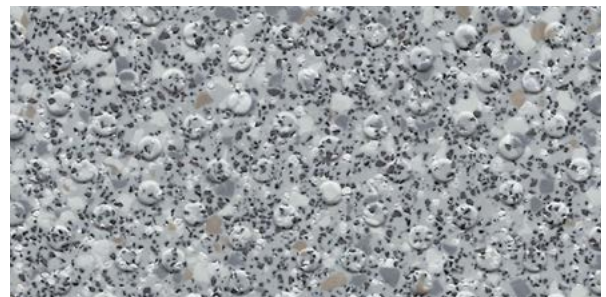


Woodland Grey **H4770**
NCS S 4500-N

w/r 9120
LRV 27.5

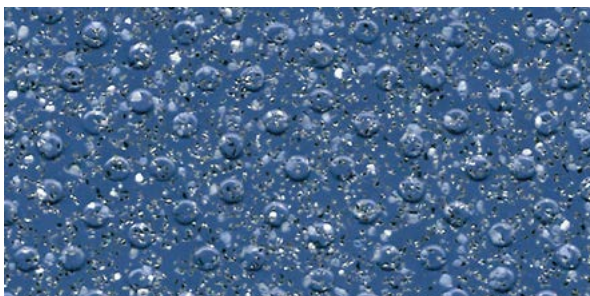

Blue Forge **H4850**
NCS S 5030-R70B

w/r 4850
LRV 9.2

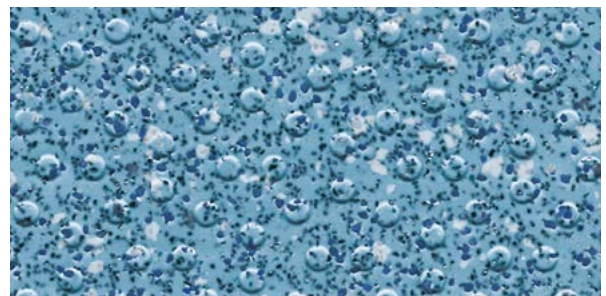

Marine **H4870**
NCS S 4030-B

w/r 4700
LRV 18.5

Heavy-duty safety flooring for continually wet areas, barefoot & shod.

w/r = weld rod NCS = Natural Colour System LRV = Light Reflectance Value



° Refer to BRE Global ratings on www.greenbooklive.com

