

# WICANDERS WISE

## cork Essence


Protective Surface

Genuine Cork Veneer

Agglomerated Cork 2,6 mm

HDF — High Density Fiberboard with Corkloc

Integrated Cork Underlay 0,8mm

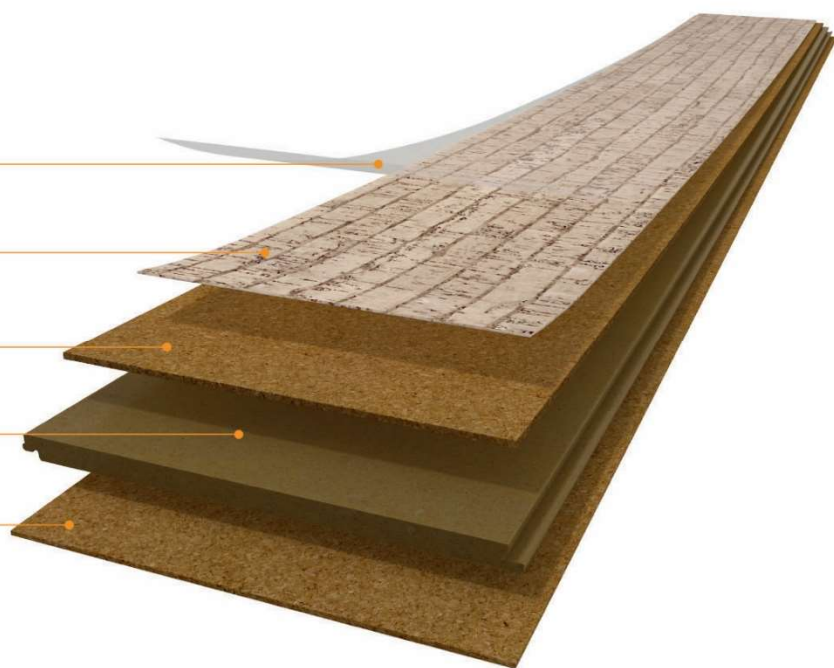

Technical Data Sheet	Standard	Unit	Value
Dimension (LxWxT)	-	-	905x295x10,5mm
Mass per unit	-	Kgs / m <sup>2</sup>	7,68
Packaging (box / pallet)	-	m <sup>2</sup>	2,136 / 111,072 - 905x295x10,5mm
Level of use Domestic	ISO 10874	Class	23
Level of use Commercial	ISO 10874	Class	33

#### General properties - EN 12104 - EN 20326

Thickness, t -	EN ISO 24346	± 0,25	Complies
Length, l	EN ISO 24342	+/- 0.5%	Complies
Width, w	EN ISO 24342	+/- 0.10%	Complies
Squareness, q	EN ISO 24342	< 0.2	Complies
Straightness, s	EN ISO 24342	≤ 0,30	Complies
Openings, o	ISO 24337	max ≤ 0,20 mm	Complies
Height difference, h	ISO 24337	hmax ≤ 0,15 mm	Complies
Flatness of the panel (Length - concave / convex)	ISO 24337	concave ≤ 0,50 %, / convex ≤ 1,0 %	Complies
Flatness of the panel (Width - concave / convex)	ISO 24337	concave ≤ 0,15 %, / convex ≤ 0,20 %	Complies
Dimensional Stability	ISO 20326 (Anex C)	≤ 0.15 %	Complies

#### Classification properties - EN 12104 - EN 20326

Wear resistance IP	EN 14354 (Annex D)	≥ 2 500 cycles	Complies
Castor chair resistance	ISO 4918	25 000 cycles	Complies
Simulated movement of a furniture leg	Visual	No damage shall be visible after test- ing with a foot type 2	Complies
Residual Indentation	EN ISO 24343-1	≤ 0,3 mm	Complies
Swelling	ISO 24336	≤ 18%	Complies

#### Safety properties - EN 14041

Fire resistance	EN ISO 11925-2 + EN ISO 9239-1 : Class EN 13501-1	Class	Cfl-s1
Slip Classification +A55	EN 13893	Class	DS
Formaldehyde emission	EN 717-1	Class	E1
Content pentachlorophenol (PCP)	EN 14041 Annex B	mg/kg	Undetectable

#### Additional properties

Impact sound reduction	EN ISO 10140	dB (ΔLw)	16
Walking noise	IHD-W431	dB %	13,2 51,6
Thermal resistance (Thermal conductivity)	EN ISO 10456	m <sup>2</sup> ·K/W	R ≤ 0,150