Smart choice.

Amazing sensations.

STAINAS

PODUC

wood WISE



Sustainability is our ground. Being inspired by Nature is the beginning.

Amorim, the world market leader of flooring with cork incorporated, defines its mission as a continuous effort to add sustainable value to cork, and as a result, to preserve the cork oak forest in a unique example of green economy.

Aligned with those values and inspired by Nature, Amorim has been producing flooring with a promise to provide high quality and sustainable flooring products, ensuring a higher quality of life while preserving and protecting the environment.







With respect for nature and wellbeing in our core values, Amorim has reached a remarkable carbon negative footprint in its entire process, helping to reduce the Global Warming Potential.

Environment

Potential (GWP).

Economy

industries.

No trees are damaged or cut during

5x more CO₂ from the atmosphere helping to reduce Global Warming

The cork oak forest creates jobs

in the cork industry and in other related

harvesting; The cork oak forest retains

01. Sustainable by heart



Amorim floors are the purest outcome of a Circular Economy model that aims to turn waste and used cork stoppers into a valuable and sustainable product.







Social Impact

The cork industry promotes settlement in areas at risk of desertification; Cork harvesting is an activity that crosses generations.



Close distances

Factories are located within few miles from the forests.

Reincorporation of waste Any cork waste and surplus

Any cork waste and surplus is collected, granulated and reincorporated in the production process, originating a lower carbon footprint.

Biomass

The dust from the production lines is vacuumed and conducted to silos, where it is burned to generate energy through biomass. 65% of our energy comes from cork dust.

03. Sustainable Products



q An to E P R R su er S B



02.

Green Production Process

Indoor air quality





Amorim has several Indoor Air Quality certificates, that certify that no harmfull particles are present in our flooring products living up to our promise to provide wellbeing in every room.

Environmental Performance




Respect for nature is at the core of our existence, therefore making sure our processes and products respect the highest standards in environment protection is embedded in our culture.

Sustainable Buildings



All of our products contribute with points to LEED and BREEAM certifications - the American and European certifications for sustainable construction and projects.

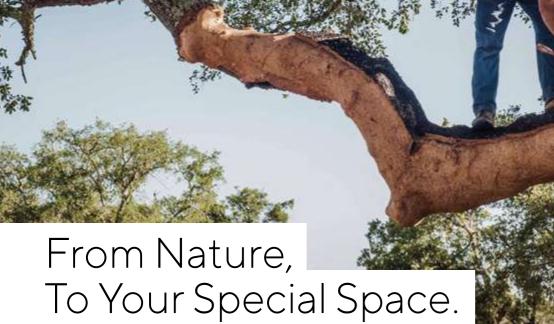


By using a unique engineered multilayer structure, which combines state-of-the-art

technology with the exclusive natural properties of cork, a higher standard in flooring is achieved, providing the perfect match between beauty, comfort and durability.





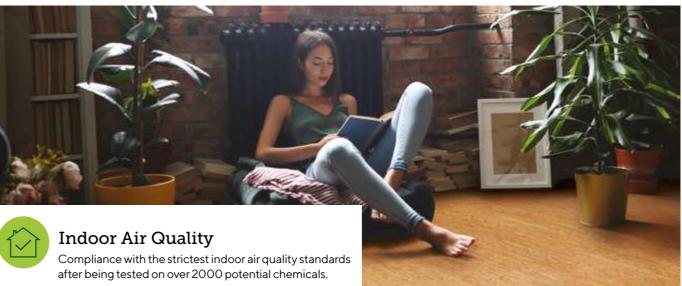









even when walking barefoot.



Cork Rigid Core

WISE by Amorim is a Climate Positive, PVC Free product. With a carbon negative footprint, WISE is based on cork, a 100% sustainable material. The perfect match between your wellbeing and respect for nature.



The Wisest choice. Cork Rigid Core (CRC)



| PVC FREE PROTECTIVE LAYER | |
|-------------------------------------|--|
| Class of use 33 | 1997 - 1997 1997 - 1997 |
| DECORATIVE VISUAL | |
| Wood or Cork | |
| COMFORT + | |
| Corkinlay | |
| PVC FREE CORK RIGID CORE | Martin Carl |
| 2G ANGLE /ANGLE INSTALLATION SYSTEM | Alexand |
| COMFORT + | and the second designed as a second designed as a second designed as a second designed as a second designed as |
| Integrated cork underlay | |









Superior Wear Resistance (suitable for commercial areas)



No Trees Cut Down



Pattern repeat every 9 boards



60 linear feet before an expansion is needed

The Wisest choice. Seamless Visual



WISE


ないころと

Installation in large areas without transition strips (up to 3,200 square feet without transition strips)



No expansion joints in between rooms

0

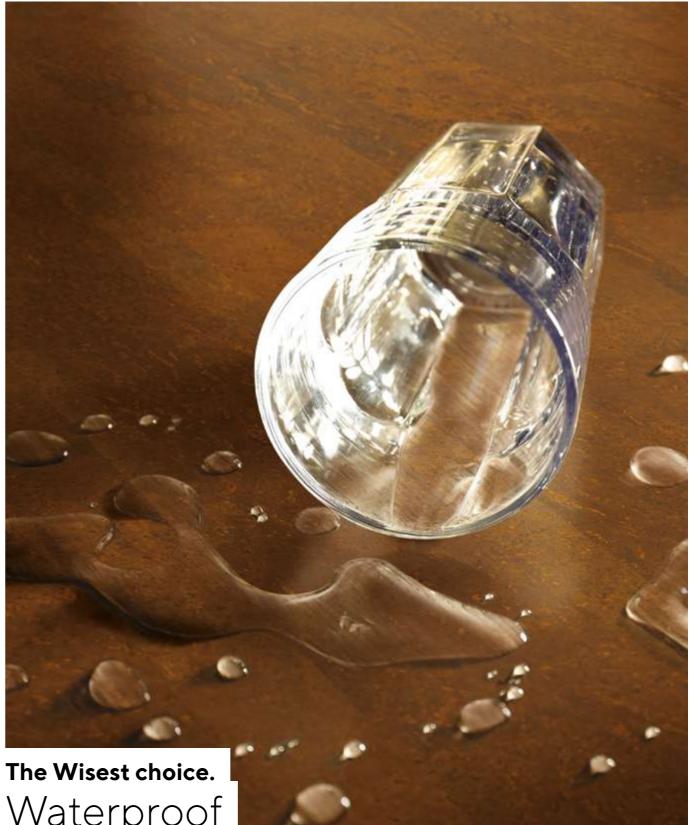

Waterproof



Waterproof





Easy to Clean (mop friendly)



Amorim represents a unique balance between the creation of innovative products and the protection of the environment, combining state-of-the-art technology with the amazing natural properties of cork.

Created by Humans, Inspired in Nature





wood

Technical solution

| SRT PVC FREE PROTECTIVE WEAR LAYER | |
|-------------------------------------|--|
| Class of use 33 | |
| WOOD PRINTED FILM VISUAL | |
| PVC Free | |
| COMFORT + | |
| Corkinlay | |
| PVC FREE CORK RIGID CORE | |
| 2G ANGLE /ANGLE INSTALLATION SYSTEM | |
| COMFORT + | |
| Integrated cork underlay | |

Formats

48 15/64" x 7 31/64" x 9/32 "



En I \frown Floating

4 side micro bevel

Finishing & Warranty



SRT - SUPERIOR RESISTANCE TECHNOLOGY

PVC FREE Superior resistance technology wear layer developed to adapt to the multilayered construction with excellent behavior for heavy commercial traffic. Provides a superior sense of comfort, high mechanical strength and stain resistance.



The product samples images in this collection were cut from a larger piece. Decor and shade may vary slightly.



White Forest Oak AEUS001



Contempo Loft AEUA001



Natural Dark Oak AEUK001





White Forest Oak





Beach House



Barnwood AEUW001



Farmhouse AEUQ001



Treehouse AEUPOO1









Chocolate Brown Oak



Mystic Grey Oak



Dark Forest Oak



Highland Oak





Quartz Oak AEYMO01



Ocean Oak AEYF001




Sprucewood AEYBOO1



Mocca Oak AEYLOO1



Dark Onyx Oak AEYKOO1

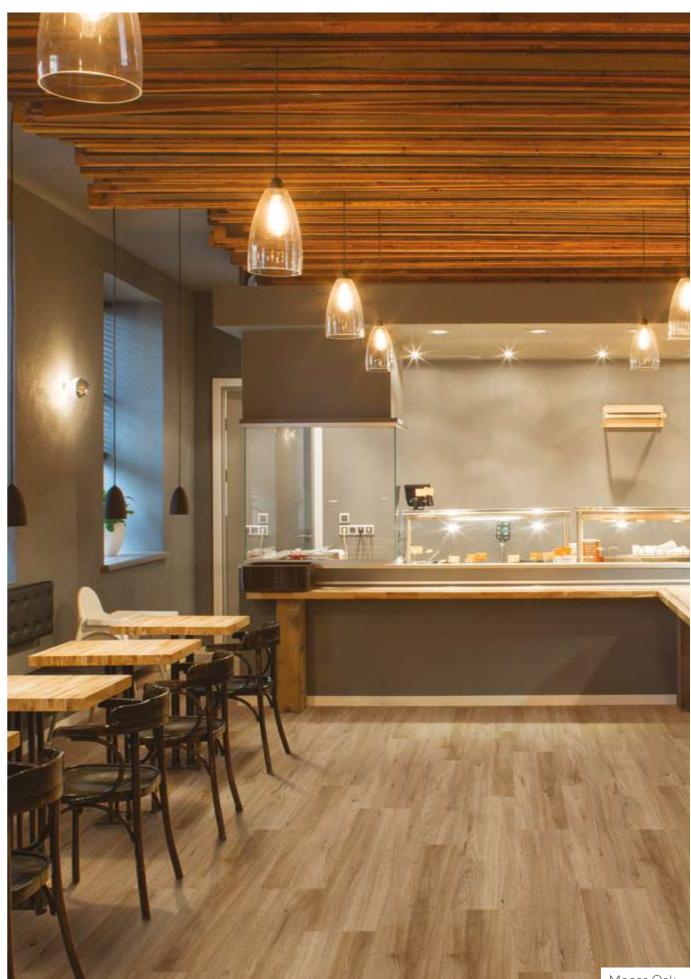



Mocca Oak





Royal Oak AEYDO01



Mountain Oak AEYA001



Field Oak



Cyber Oak AEYJOO1





Ocean Oak

Maintenance

Optimal care for an everlasting beauty

To keep your floor spotless, Amorim recommends this list of auxiliary products. Each of these has a specific purpose and is designed to make the caring of your floor as easy as possible.

Regular Maintenance

| Manufacturer | Refs. |
|--------------|-----------------------------|
| LOBA | LOBACARE Cleaner LOBACA |
| BONA | BONA Cleaner BONA Spray M |
| MAPEI | Ultracoat Universal Cleaner |

Soft Cleaner

This mild detergent is appropriate for weekly or even daily cleaning. It can be used to remove dirt, stopping it from infiltrating in the joints and in the regular embossing of the product.



Spray Cleaner

Designed for regular cleaning, this mild detergent has the advantage of being a spray, which makes it a quick and easy solution to apply directly on the floor. It is very effective in cleaning dirt or grease stains.



25



Technical data sheet

| | Standard | Unit | Value (Wood SRT) |
|---|-----------|--|-----------------------|
| Level of use Domestic | ISO 10874 | Class | Class 23 |
| Level of use Commercial | ISO 10874 | Class | Class 33 |
| General properties - EN 16511 | | | |
| Thickness | ISO 24337 | mm | nominal +- 0,25 |
| Length | ISO 24337 | [] I ≤ 0,5 mm | nominal value 1225 mm |
| Width | ISO 24337 |] wavg ≤ 0,10 mm, relative to nominal value wmax - wmin ≤ 0,20 mm | nominal value 190 mm |
| Squareness | ISO 24337 | qmax (mm) | ≤ 0,20 |
| Straightness | ISO 24337 | smax (mm/m) | ≤0,30 |
| Openings | ISO 24337 | mm | ≤ 0,20 |
| Height difference | ISO 24337 | mm | ≤ 0,15 |
| Flatness of the panel (Length - concave / convex) | ISO 24337 | % | ≤ 0,50 / ≤ 1,00 |
| Flatness of the panel (Width - concave / convex) | ISO 24337 | % | ≤ 0,15 / ≤ 0,20 |

Standard Unit ASTM Standards ASTM E90 /ASTM E413 Airborne sound transmission loss STC Impact sound transmission ASTM E492 /ASTM E989 IIC Thermal resistanceA STM C177 R-va ASTM C177 Thermal conductivity λv Residual indentation ASTM F1914 % Static load limit ASTM F970 ino

(a) Grade 5 - No change / Grade 4 - Slight change / Grade 3 - Moderate change / Grade 2 - Considerable change / Grade 1 - Strong change (b) Group 3: Grade 4

Classification properties - EN 16511

| Wear resistance IP | EN 15468, procedure B | n° revolutions | >5000 revolutions |
|---|--|--------------------------------------|-----------------------------|
| Impact resistance [mm] (big ball) | EN 13329:2006+A1:2008, Annex F | mm | ≥1600 |
| Effect of furniture leg | EN 424 (tested with foot type 0) ISO 16581 | | no visible change / damages |
| Castor chair resistance | EN 425 | Visual effect after 25 000 cycles | no visible change/damages |
| Dimensional stability due to variation of temperature | EN ISO 23999 | % | ≤ 0,15 |

Safety properties - EN 14041

| Slip Classification | EN 13893D | | S |
|---------------------------------|-------------------|---------|--------------|
| Formaldehyde emission | EN 717-1E | | 1 |
| Content pentachlorophenol (PCP) | EN 14041. Annex B | % | Undetectable |
| Thermal conductivity | EN 12667 | W/(mK) | 0,135 |
| Thermal resistance | EN 12667 | (m²K)/W | 0,05 |

Additional properties

| Resistance to staining | EN 438-2: Group 1 only 10 min | Grade ^(a) | Grade 5 ^(b) |
|------------------------|----------------------------------|----------------------|--|
| Swelling | ISO 24336 | % | <1 |
| Impact sound reduction | EN ISO 10140-3 | dB ([] Lw) | 15 |
| Walking noise | IHD-W431 | dB% | Reduction improvement 9,2 dB Difference of loudness 39% |



TÜV-PROFiCERT-product Interior brand is a voluntary, independent label for VOC-emission and quality of floorings. The results comply with the emission thresholds of AgBB, Belgian VOC regulation, Finnish M1 classification, BREEAM Exemplary Level, LEED v4 (outside North America), RAL-UZ 120 and Austrian Eco Label (Guideline UZ 56).



As of January 2012, France has adopted regulations that limit total VOC emissions of building products. Manufacturers, selling their products in France must obtain a classification ranging from A+ (very low emissions) to C (high emissions). The declared goal is to improve indoor air quality in private/ commercial buildings.



The Blue Angel is a voluntary certification that guarantees that a product or service meets high standards when it comes to its environmental, health and performance characteristics. In the process, these products and services are always evaluated across their entire life cycle.



that limit formaldehyde emissions of buildings products, in order to improve be sold in Japan, they must have the classification ranging from F4 stars the international standard ISO 14025. (extremely low emissions) to F3 stars (low emissions), but in this case with some restrictions.



| it | Value (Wood SRT) |
|---------------|------------------|
| | |
| C (dB) | 63 |
| (dB) | 71 |
| value (m2K)/W | 0,0569 |
| value W/(m.K) | 0,123 |
| | 0,4 |
| ormm | 0,067 |
| | |



Greenguard Certification helps the identification of interior products and materials that have low chemical emissions, improving the quality of the air in which the products are used. It promotes global sustainability, environmental health, and safety.



CE marking is a certification mark that indicates conformity with health, safety and environmental protection standards for products sold within the European Economic Area (EEA).



Under Approval

In 2003 Japan has adopted regulations An Environmental Product Declaration is a verified document that reports environmental data of products based indoor air quality. So that products can on life cycle assessment and other relevant information in accordance with





HeadQuarters Amorim Revestimentos S.A (+351) 227 475 600 geral ar@amorim.com

www.amorimflooring.com

US HeadQuarters

Amorim Flooring North Americ (+1) 410 553 60 62 info.ar.us@amorim.com







CE