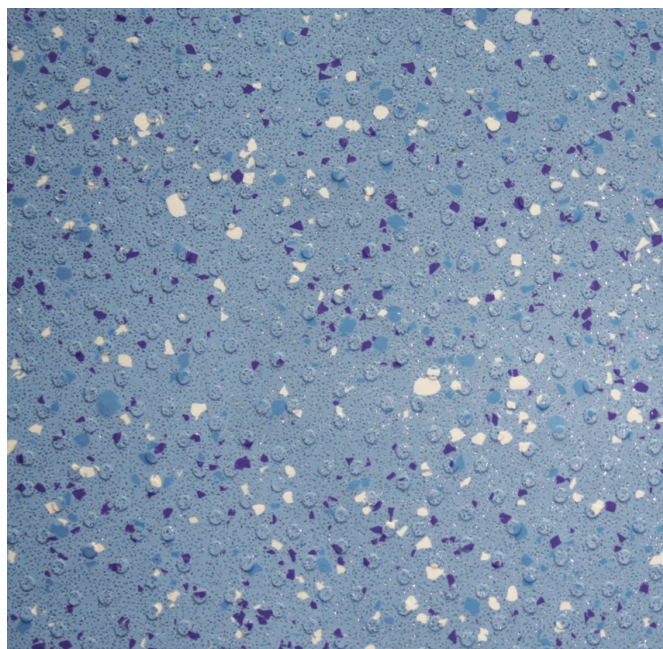




IN
DISTRIBUTION

Tarasafe Ultra H₂O

High performance slip resistant safety flooring for wet and dry, barefoot and shod applications




7413 Ocean Blue
WR: 0585 0823 / LRV: 31.8




7325 Seashore
WR: 0585 2654 / LRV: 63.0




7314 Sand
WR: 0585 2174 / LRV: 41.2




7513 Seagrass
WR: 0585 2435 / LRV: 36.2




7418 Marine
WR: 0585 0190 / LRV: 22.8



7720 Iceberg
WR: 0585 2415 / LRV: 60.6



7746 Stone
WR: 0585 0033 / LRV: 23.6



7732 Gravel
WR: 0585 2238 / LRV: 9.7



This range complements the Tarasafe Ultra collection (see reverse).



WR: Welding Rods*
LRV: Light Reflectance Value
*Subject to change. Please confirm when ordering.

Gerflor®
theflooringroup

Tarasafe Ultra H₂O

For wet and dry, barefoot and shod applications

Tarasafe Ultra H₂O is an enhanced slip resistant safety vinyl floor covering with a raised emboss designed for applications where there are continuous wet areas.

It provides exceptional barefoot comfort and is an ideal solution for shower and changing rooms and any high level risk wet areas where heavy duty safety flooring is required.

A popular choice in the education, healthcare, leisure, hospitality, housing markets and any applications where slip resistance needs to be maintained.

- High level of wet and dry slip resistance
- Complements the popular Tarasafe Ultra range

TECHNICAL INFORMATION Tarasafe Ultra H₂O

Thickness	EN 428	mm	2.0
Wear layer thickness	EN 429	mm	1.00
Weight	EN 430	g/m ²	2400
Width of sheet	EN 426	cm	200
Length of sheet	EN 426	lm	20
Norm / Product specification	-	-	EN 649
European classification	EN 685	class	34 -43
Fire rating	EN 13501-1	class	Cfl-s1
Static electrical propensity	EN 1815	kV	< 2
Slip resistance wet: shod	DIN 51 130	class	R11
Slip resistance wet: barefoot	DIN 51 097	class	C
Slip resistance: pendulum #55	BS 7976-2	PTV	≥ 36
Surface roughness	Rtm/Rz	µm	≥ 20
Slip resistance: ramp test	EN 1345 (annex C)	class	ESf-ESb
Wear resistance	EN 660.2	mm ³	≤ 4.0
Wear group	EN 651	-	P
Type binder content	ISO 10582	type	I
Dimensional stability	EN 434	%	≤ 0.40
Residual indentation	EN 433	mm	≤ 0.10
Castor chair test (type W)	EN 425	-	OK
Thermal conductivity	EN 12 524	W/(m.K)	0.25
Colour fastness	EN 20 105-B02	degree	≥ 6
Chemical products resistance	EN 423	-	OK
Anti-bacterial activity (E.coli - S.aureus - MRSA) ^[1]	ISO 22196	-	>99% inhibits growth
TVOC after 28 days	ISO 16000-6	µg/m ³	<100
CE	EN 14041		

[1] The implementation of an effective cleaning method is the best defence against infection



For more information please visit: www.gerflor.co.uk

















CI SFB	(43)	Tn6
--------	------	-----

UK reference - September 2017

Order your free samples now and don't forget to ask for your Tarasafe Ultra safety floor

Complementary colour references:

Tarasafe Ultra H ₂ O								
	7325 Seashore	7314 Sand	7513 Seagrass	7418 Marine	7413 Ocean Blue	7720 Iceberg	7746 Stone	7732 Gravel
Tarasafe Ultra								
	7383 Diopside	7384 Citrine	4505 Peridot	4465 Cobalt	7482 Halite	8701 Opal	8709 Granite	8717 Obsidian

For more information please contact:

United Kingdom: Gerflor Ltd

Tel: +44 (0)1926 622 600

Email: contractuk@gerflor.com

Visit: www.gerflor.co.uk

Ireland: Gerflor Ltd

Tel: +353 (0) 42 966 1431

Email: gerflorirl@gerflor.com

Visit: www.gerflor.ie

Gerflor
theflooringgroup