


PREMIUM RECYCLED CARPET UNDERLAY

Protected by



Keeps the foam surface fresher

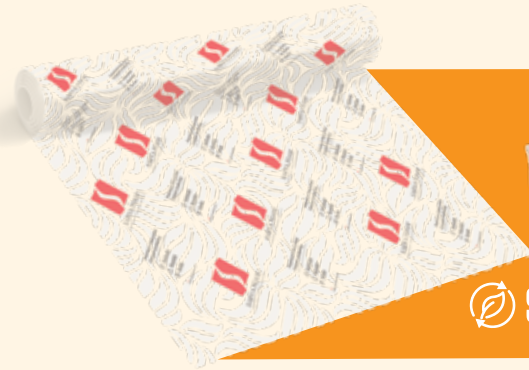

Sustainable



Recyclable



Durable

Specifications

Characteristic	Test Method	Result
Product density	--	Medium
Nominal roll area	--	15.07m ²
Nominal thickness	--	10.00mm
Backing	--	Spun bound non woven fabric
End Use Classification	BS EN 14499:2015	GD/U General Domestic Use
Work of Compression	BS 4098/ BS ISO 2094	>117 J/m ²
Retention of work of compression	BS 4098 / BS ISO 2094	>75%
Loss in thickness after static loading	ISO 3416	<8%
Loss in thickness after dynamic loading	BS ISO 2094	<8%
Resistance to cracking	BS EN 14499:2015	Pass
Flammability - Hot metal nut test	BS EN 4790	Medium radius of effects of ignition
Tog rating	BS 4745:2005	2.55
Impact sound improvement	BS EN ISO 10140-3	36 dB

Notes

- The listed roll dimensions are nominal and may have minor variations. However, they will meet the specifications outlined in BS EN 14499:2015.
- The value is based on test results from a comparable product.

This product is manufactured in a facility certified to iso 9001, 14001, and 45001 standards.

SARVA FOAM INDUSTRIES PVT. LTD.

Factory - Unit-1, Premier Park, Lichfield Road,
Branston Industrial Estate, Burton, DE14 3HD

www.sarvafoam.com