

# WOCA Patina Discs

- The new way of oiling



Preparing today for tomorrow




- Completely oiled surface in one application
- Saturation from day one
- Easy to maintain

## Product info

Available: package containing 6 pieces

Consumption:  $\pm 100-200 \text{ m}^2$  per Patina Disc

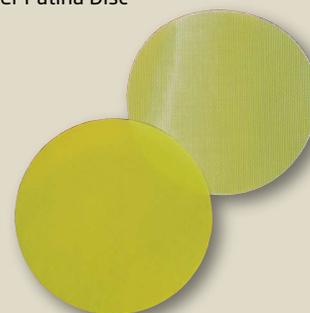

## Application area

With the introduction of the green Patina Discs, WOCA presents a new revolutionary way of oiling floors. By using the Patina Discs it is now possible to make a one-coat-application of the floor. The surface is saturated immediately, becomes hard-wearing, silky smooth, and easy to maintain.

## Result

The floor is well saturated, feels soft, dries quickly and has a silky-mat gloss.


In order to achieve this result, we recommend using WOCA High Solid Master Oil, natural or white. The oil has a low content of solvent and fills the grains of the wood excellently. This guarantees a hard-wearing surface.

# How to do...

- WOCA Patina Discs:  
the new way of oiling



Preparing today for tomorrow

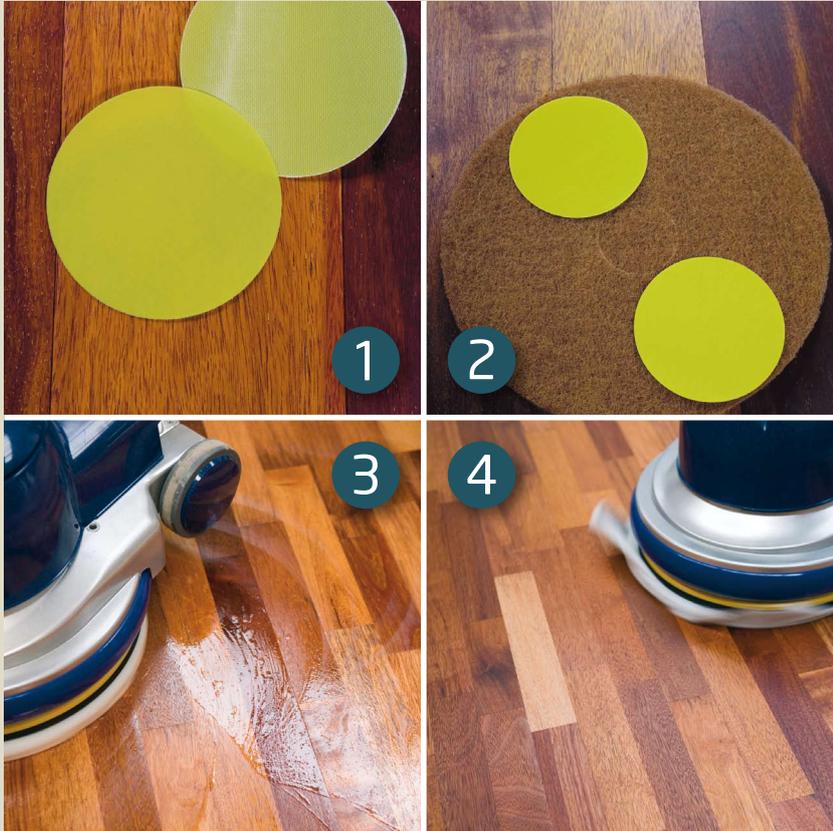

## Tools

Polishing machine or pad holder  
each with the appropriate pads  
in beige or white, oil absorbing  
cloths.

## *Please notice!*

***Risk of self-ignition! Due to the risk of self-ignition it is important that sanding dust and oil wetted cloths are soaked in water and disposed of in a tightly closed container after use.***

- 1 A Patina Disc has one side with a very fine abrasive grit and one side with a Velcro layer which enables the disc to attach to a pad.
- 2 Two Patina Discs are placed opposite to each other on a beige/red/green pad.
- 3 Apply the oil using a paint roller or a brush, hereafter polish with a pad and the two Patina Discs fixed on to the pad. The combination of light sanding and polishing helps the oil penetrate faster into the wood and results in a very smooth finish. The wood must not dry during the process of application. Always make sure that sufficient oil is applied, in order to work wet in wet.
- 4 When the surface appears saturated remove excess oil using a cotton cloth. Finally, polish with a clean white pad, in order to obtain a uniform gloss.

The result is a highly saturated floor that feels smooth, dries quickly and has a silky-mat gloss.

In order to achieve this result we recommend using WOCA High Solid Master Oil natural or white. The oil features a low content of solvent and fills the pores of the wood excellently. This guarantees a hard-wearing surface.

Priming with WOCA Wood Lye in white or grey with a subsequent treatment with WOCA Colour Oil may also be applied in this way. In order to obtain a more intensive colour we recommend applying two layers of colour oil. Apply the first layer using the traditional method. After three to four hours apply the second layer using a pad and the two Patina Discs fixed on to the pad.

For maintenance purposes, the Patina Discs may also be used with WOCA Maintenance Oil.